

MIDAS AMPLIFICATION


MODULAR MIXER SYSTEM

STD. OPTIONS :-

TX'S :- LINE : MIC : NONE

I.P. CONNECTORS :- MIC :- XLR : JACK | LINE :- XLR : JACK

PHANTOM POW

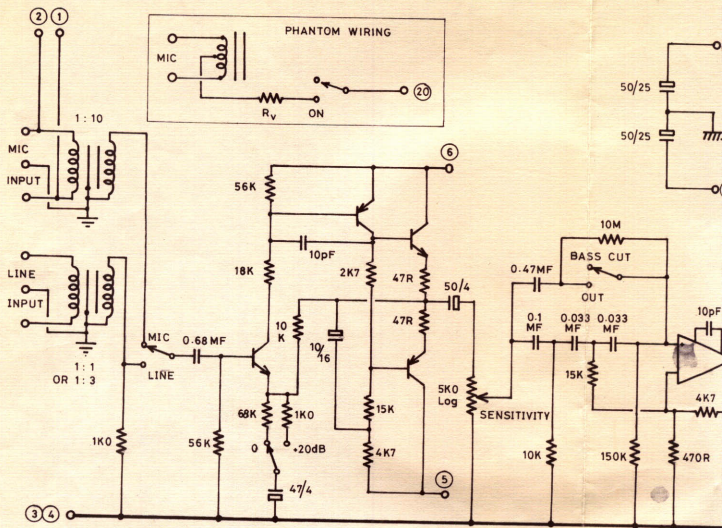

A = 0 OR +20

A = +20

EDGE CONNECTOR PIN DESIGNATION


1	MIC INPUT COLD	14	OUTPUT 2
2	MIC INPUT HOT	15	OUTPUT 3
3	SUMMING EARTH	16	OUTPUT 1
4	" "	17	OUTPUT 5
5	- 16V	18	OUTPUT 6
6	+ 16V	19	P.F.L. SUMMING BUS
7	FOLDBACK O.P 1	20	PHANTOM
8	FOLDBACK O.P 2	21	
9	FOLDBACK O.P 3	22	PRE-FADE SEND
10	ECHO O.P 1	23	PRE-FADE RETURN
11	ECHO O.P 2	24	0V OUTPUT EARTH
12	ECHO O.P 3	25	" " "
13	OUTPUT 4		

MODIFICA

REF :

XLR: JACK PHANTOM POWER: V INSERT: - J'FIELD: MODULE: NONE ROUTING: -

ISSUE 2 Passed:

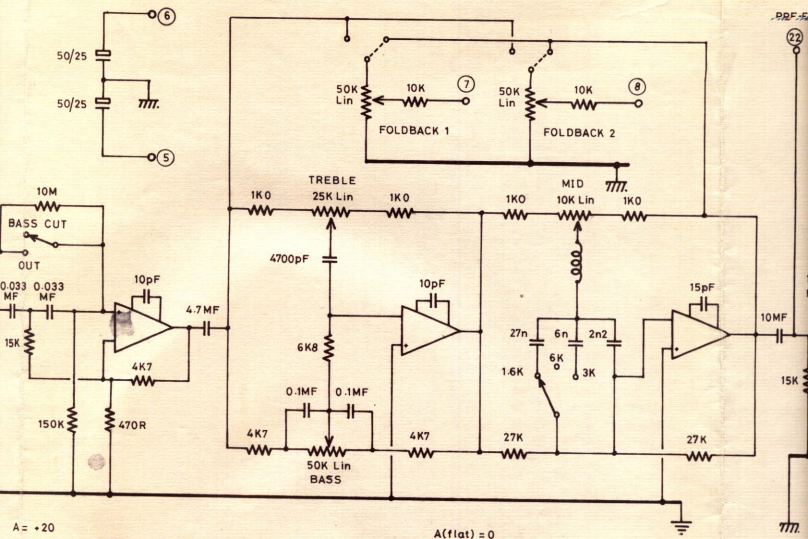

MODIFICATIONS	ADDITIONAL CIRCUITRY

REF :

INPUT MODULE

PR003

ISSUE 2 Passed :

Date :

Serial No.:

QUANTITY :

